



## THERMAL ANALYTICS CAMERA ELARA™ FC-SERIES ID

The Elara FC-Series ID combines best-in-class thermal image detail and high-performance edge perimeter analytics in a single device that delivers optimal intrusion detection in challenging environments and extreme conditions. Elara FC-Series ID cameras feature on-board video analytics optimized for FLIR's thermal sensors. Easy to set up and capable of classifying human or vehicular intrusions, Elara FC-Series ID cameras provide reliable detection with low false alarm rates, all without human intervention.

[www.flir.com/thermal-security](http://www.flir.com/thermal-security)



### RELIABLE ONBOARD ANALYTICS

Accurately classify humans and vehicles


- Auto calibration for depth setup for a simple and reliable configuration.
- No additional measurement tools are needed, requiring only a single installer on site
- Allows analytics in corridor mode, reducing the number of cameras and improving the total cost of ownership
- Target hand-off to PTZ camera auto-tracking



### INDUSTRY-LEADING IMAGE QUALITY

Crisp, Clean Imagery for Unmatched Video Analytics Performance & Reliability

- Superior image quality in low-contrast conditions
- FLIR's custom AGCs provide images with extremely high contrast
- Dynamic Detail Enhancement (DDE) creates sharp edges and contrast that improve analytics performance

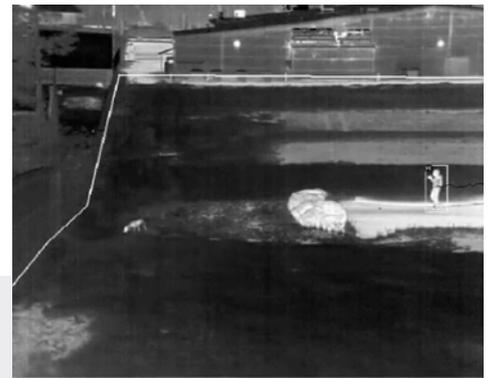

### HIGH-PERFORMANCE LENSES

Wide Range of Lenses for Optimal Detection Ranges in All Conditions

- Choose from 17 high-performance lenses suitable for any perimeter or open area, including QVGA from 4° to 69° fields of view and VGA from 8° to 90° fields of view
- High performance optics deliver clear thermal video

# SPECIFICATIONS

	Elara FC 3xx ID-Series	Elara FC 6xx ID-Series
<b>Image</b>		
Array Format (NTSC)	320 x 240	640 x 480
Detector type	Long-Life, Uncooled VOx Microbolometer	
Spectral range	7.5 µm to 13.5 µm	
Effective resolution	76,800 pixels	307,200 pixels
Pixel Pitch	Effective 34 µm (FC-344,332& 369) 17 µm (all other models)	17 µm
Thermal frame rate	NTSC: 30 Hz - PAL: 25 Hz / 8.3 Hz	
E-Zoom	4x continuous E-Zoom	
Focus	Athermalized, focus-free	
Sensitivity	<35mK for F# 1.0 optics	
<b>Video</b>		
Composite Video NTSC or PAL	Hybrid system with IP & analog video, Dynamic NTSC or PAL settings	
Analog Video Output Composite	1Vp-p (PAL or NTSC), 1 x BNC 75Ω	
Video Compression	Two independent channels of H.264 (Restricted VBR and CBR, 10kpbs-4Mbps, MPEG4, and MJPEG)	
Streaming Resolution	D1: 720x576, 4CIF: 704x576, Native: 640x512, Q-Native: 320x256, CIF: 352x288, QCIF: 176x144	
Thermal AGC Modes Features	Brightness, Contrast, Sharpness, Grey Shade Compression, Gamma, Smart Screen Balance	
Thermal AGC Region of Interest (ROI)	Default, Presets and User definable to insure optimal image quality on subjects of interest	
Analytics Management	Web-based configuration and management. Masking of analytic detection areas, adjustable sensitivity, automatic responses, remote I/O control	
Analytics Features	Region Entrance/Intrusion Detection, Crossover/Fence Trespassing;	
Image Uniformity Optimization	Automatic Flat Field Correction (FFC); Thermal and Temporal Triggers	
SD Card Snapshot Capture	Support for 32GB SD Card (sold separately)	
<b>System Integration</b>		
Ethernet	10/100 Mbps	
External Analytics Compatible	Yes	
Control Input/Output	1x Dry Contact in; 1x Relay Out (rated load 0.025A@5VDC)	
Network APIs	FLIR SDK, FLIR CGI, ONVIF Profile S	
<b>Network</b>		
Supported Protocols	IPv4, HTTP, Bonjour, UPnP, DNS, NTP, RTCP, TCP, UDP, ICMP, IGMP, DHCP, ARP, FTP, RTP/RTSP, Unicast/Multicast, TCP/IP, HTTP, IEEE 802.1X, SNMP	
<b>General</b>		
Weight with sunshield	7.5/9/13/19/25/35mm 1.8kg (4 lb.) - 60mm 2.0kg (4.5 lb.) - 75mm 2.2kg (4.75 lb.)	
Weight without sunshield	7.5/9/13/19/25/35mm 2.2kg (4.75 lb.) - 60mm 2.4kg (5.25 lb.) - 75mm 2.5kg (5.5 lb.)	
Dimensions (L, W, H)	Without sunshield: 259 x 114 x 106 mm/10.2" x 4.5" x 4.2" With sunshield: 282 x 129 x 115 mm/11.1" x 5.1" x 4.5"	
Input Voltage	Source	POE (802.3af) POE+ (802.3at) 12VDC 24VDC 24VAC(VA)
	Heater off	<5.5W <5.5W <5.5W <5.5W <8W
	Heater on (@ 100%)	N/A <25W <25W <25W <32W
Surge Immunity on AC Power Lines	CE: EN55032 Class A; FCC 47 CFR Part 15, Subpart B, Class A (within CISPR 22:2008 Class A limits)	
Surge Immunity on Signal Lines	EN 55024: 2010 and 55032: 2010 to 4.0kV on AC aux power lines; EN 50130-4:2011; IEC 62599-2:2010	
<b>Cyber Security</b>		
	IEEE 802.1x TLS/HTTPS User authentication Access control via firewall Digest authentication	

<b>Environmental</b>	
IP Rating (Dust & Water Ingress)	IP66 & IP67
Operating Temperature Range	-50°C to 70°C / -58°F to 158°F (Continuous Operation) -40°C to 70°C / -40°F to 158°F (Cold Start)
Storage Temperature Range	-50°C to 85°C / -58°F to 185°F
Humidity	0-95% relative humidity
Shock	MIL-STD-810G "Transportation"
Vibe	IEC 60068-2-27
De-Icing / Anti-Icing	MIL-STD-810 F, Method 521.2 - 6mm ice, 120 minutes with POE+, 4mm ice with POE af FC-304, FC-305, FC-610 & FC-608 with Cold Weather kit
<b>Warranty &amp; Regulatory</b>	
Approvals	CE: EN55032 Class A; FCC 47 CFR Part 15, Subpart B, Class A (within CISPR 22:2008 Class A limits)
Certifications	IEC 60068-2-1:2007; IEC 60068-2-2:2007; ISTA-1A (Handling)
Compliance	RoHS Directive 2011/65/EU; WEEE 2012/19/EU
Warranty	Camera: 3 Years Sensor: 10 Years

<b>Optics</b>			
Model	FOV	F#	Focal Length
FC-369 ID	69° x 56°	F1.4	9 mm
FC-344 ID	44° x 36°	F1.0	13 mm
FC-332 ID	32° x 26°	F1.0	19 mm
FC-324 ID	24° x 18°	F1.0	13 mm
FC-317 ID	17° x 13°	F1.0	19 mm
FC-313 ID	13° x 10°	F1.1	25 mm
FC-309 ID	9.2° x 7.0°	F1.1	35 mm
FC-305 ID	5.4° x 4.1°	F1.25	60 mm
FC-304 ID	4.3° x 3.3°	F1.1	75 mm
FC-690 ID	90° x 69°	F1.2	7.5 mm
FC-669 ID	69° x 56°	F1.4	9 mm
FC-644 ID	44° x 36°	F1.0	13 mm
FC-632 ID	32° x 26°	F1.0	19 mm
FC-625 ID	25° x 20°	F1.1	25 mm
FC-617 ID	17° x 14°	F1.1	35 mm
FC-610 ID	10° x 8.2°	F1.25	60 mm
FC-608 ID	8.6° x 6.6°	F1.1	75 mm

**CORPORATE HEADQUARTERS**  
FLIR Systems, Inc.  
27700 SW Parkway Ave.  
Wilsonville, OR 97070  
PH: +1 877.773.3547

**SANTA BARBARA**  
FLIR Systems, Inc.  
6769 Hollister Ave.  
Goleta, CA 93117  
PH: +1 805.690.6600

www.flir.com  
NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2020 FLIR Systems, Inc. All rights reserved. Rev. 06/15/2020

20-0858-SEC\_A4



The World's Sixth Sense®